

Lucozade Ribena Suntory

Royal Forest Factory M&E

**morris &
spottiswood**



LOCATION

Coleford




DURATION

20 Weeks



VALUE

£1.7m

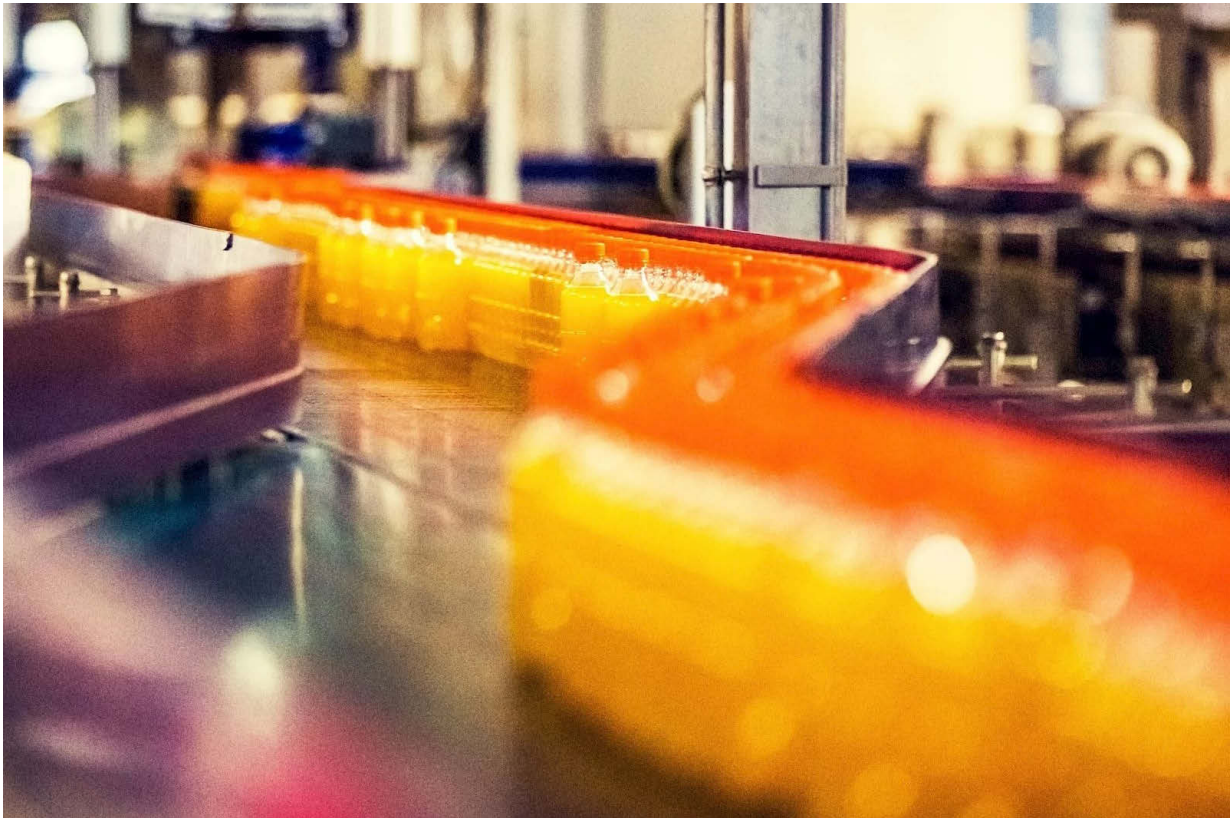

Full M&E works were carried out at Royal Forest Factory including design, supply, installation, testing, commissioning and handover of the complete building services and utility connections to plant and equipment.

Construction of an ISO 8 clean room to house a new aseptic filling process and general warehouse services upgrade.

Works included:

- A new HVAC system with 100% fresh air system & thermal wheel heat recovery
- Antimicrobial pre-insulated ducting system
- A high quality filtration & BMS system

- Process pipework services
- Hot & cold water services
- Drainage
- Sprinkler systems
- HV install
- LV switchgear & distribution system
- Small & general power
- LED & emergency lighting
- L1 fire alarm and detection

All work was designed and installed under a critical design specification and room condition guideline to support the plants operation and to minimise disruption.

Find out more at
[morrisandspottiswood.co.uk](https://www.morrisandspottiswood.co.uk)



HEALTH
& SAFETY



QUALITY



ENVIRONMENT